

DATASHEET

*Norden Millimeter is the leading developer of microwave and millimeter wave products, creating standard and custom RF amplifiers, frequency multipliers, frequency converters, and custom assemblies.*

## NDC0218I0102N10 FEATURES

RF Frequencies

**Band 1: 2-13.5 GHz**

**Band 2: 12.5-18 GHz**

IF Frequencies

**1.375 - 2.375 GHz**



Conversion Gain

**10-18 dB**


Channel Bandwidth Flatness

**+/- 2 dB**

As part of Norden Millimeter's standard catalog of down converter products, the NDC0218I0102N10 is an example of our expanding line. The converters have applications for commercial, military, and test. The NDC0218I0102N10 provides 56 dB of variable attenuation and a noise figure of 10 dB max.

We encourage you to contact our sales team at 530-642-9123 to discuss your questions and applications. With down converters, up converters, transceivers, and other products operating between 0.5 and 110 GHz, Norden Millimeter is the top choice for both standard products and custom assemblies.

Norden Millimeter is ISO 9001:2015 and AS 9100D Certified.

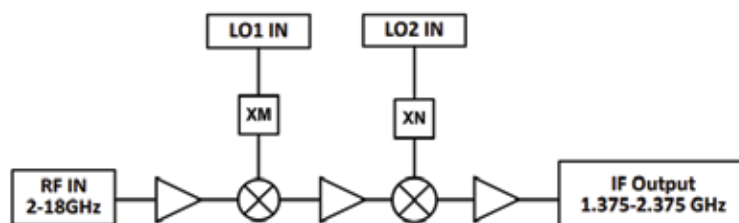

# NDC0218I0102N10

2-18 GHZ FREQUENCY DOWN CONVERTER

# SPECIFICATIONS

Specification	Units	MIN	MAX
<b>RF Characteristics</b>			
RF Input Frequency	GHz	2	18
Band 1		2	13.5
Band 2		12.5	18
RF Input Power Level, Maximum	dBm		-15
RF Input Power Level, Maximum no damage	dBm		0
Channel Bandwidth (IBW)	MHz	1000	
IF Output Frequency	GHz	1.375	2.375
IF Output Spurious	dBc		-60
IF Output Spurious as a result of Integer, Fractional multiples, and MxN	dBm		-75
Nominal Attenuation with respect to 0 dB setting	dB	56	
RF Output Attenuation step resolution	dB	1	
Conversion Gain	dB	10	18
Channel Bandwidth Flatness	dB		± 2
Delta Gain Over Temperature	dB		± 3
IF Output P1dB	dBm		11
Noise Figure	dB		10
RF/IF Isolation	dB	80	
IF Output Noise Density	dBm/Hz		-130
LO1/IF Leakage	dBm		-65
LO1/RF Leakage	dBm		-65
LO2/IF Leakage	dBm		-65
LO2/RF Leakage	dBm		-65
VSWR at RF Out			2.0:1
VSWR at IF Input			2.0:1
VSWR at LO Input			2.0:1
RF/IF/LO Connectors			
Band Switch Control, 3.3v TTL 1 bit			
RF Attenuator Control, 3.3v TTL 5 bits parallel			
	Units	MIN	MAX
IF Attenuator Control, 3.3v TTL 5 bits parallel			
<b>LO Variable (LO1)</b>			
LO1 (Swept LO) Frequency Band 1	GHz	7.76875	10.64375
Band 2		9.06875	10.19375
Input Power	dBm	0	5
<b>LO Fixed (LO2)</b>			
Frequency Band 1, IF	GHz	13.85	
Band 2, IF		10.7	
Input Power	dBm	0	5
Input Voltage	VDC	25	31
Current	A		0.6
DC/Control Connector			
D x W x H	Inches		
Base Plate Operating Temperature	°C	-40	+85
Seal	atm cm <sup>3</sup> /s air		0.0001





5441 Merchant Circle  
 Placerville, CA 95667  
 (530) 642-9123  
[www.nordengroup.com](http://www.nordengroup.com)

# NDC0218I0102N10

2-18 GHz FREQUENCY DOWN CONVERTER

# SPECIFICATIONS

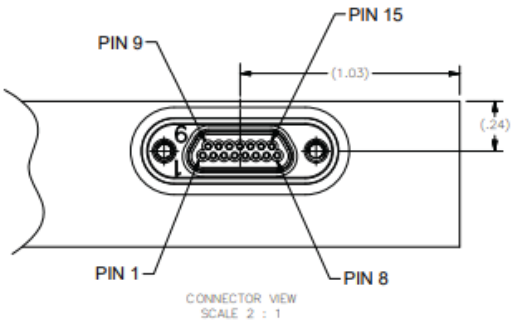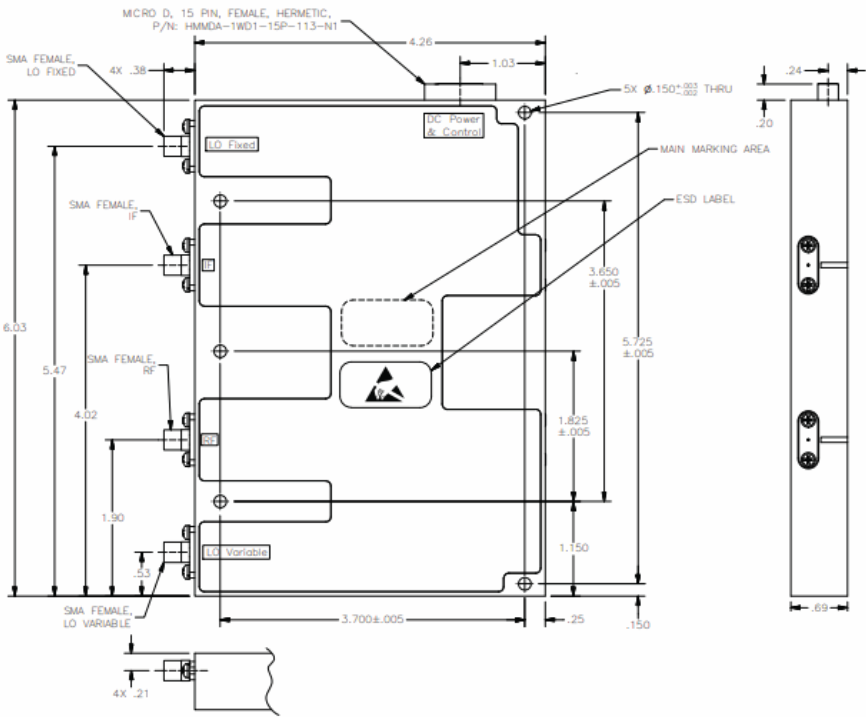

CONNECTOR	
PIN	DISCRIPTION
1	RFA1
2	RFA2
3	RFA4
4	RFAR
5	RFA16
6	IFA1
7	IFA2
8	IFA4
9	IFAB
10	IFA16
11	BAND1
12	+28V
13	GND
14	EMITTER
15	BASE/COL



5441 Merchant Circle  
 Placerville, CA 95667  
 (530) 642-9123  
[www.nordengroup.com](http://www.nordengroup.com)